



P L A N T E R W O R X
C O N T R A C T



ELEMENT E-44 PLANTER

16"H x 44"W x 16"D

VOLUME: 20 US GALLONS | 2.67 CUBIC FEET

MANUFACTURED FROM:

.125" ASTM A240 STAINLESS STEEL | NDSF FINISH ONLY | 65 lbs

T-304 (T-316L BY REQUEST),

.125" CORTEN STEEL ASTM A588 | 65 lbs

OR .125" ALUMINUM ASTM B-209, 5052 ALLOY | 23 lbs

WITH A POLYESTER BASED ARCHITECTURAL/MARINE GRADE POWDER COAT FINISH

AVAILABLE IN STANDARD FINISHES OR IN ANY RAL COLOR

DRAINAGE HOLES INCLUDED | MAY BE MANUFACTURED IN MIRRORED PAIRS



P L A N T E R W O R X 9 8 7 E S S E X S T B R O O K L Y N N Y 1 1 2 0 8

T 7 1 8 . 9 6 3 . 0 5 6 4 F 7 1 8 . 9 6 3 . 0 5 6 5

P L A N T E R W O R X . C O M



P L A N T E R W O R X C O N T R A C T

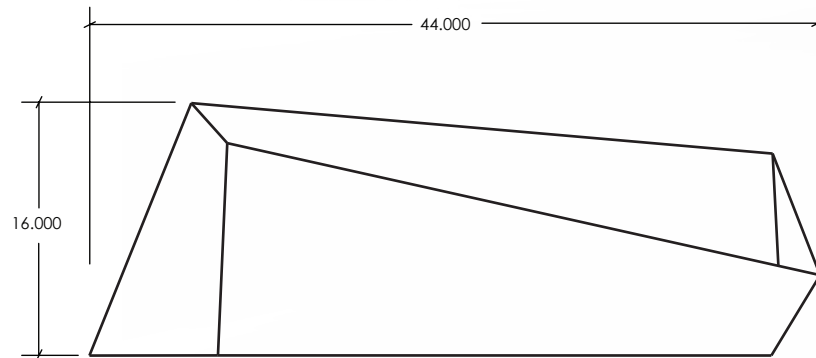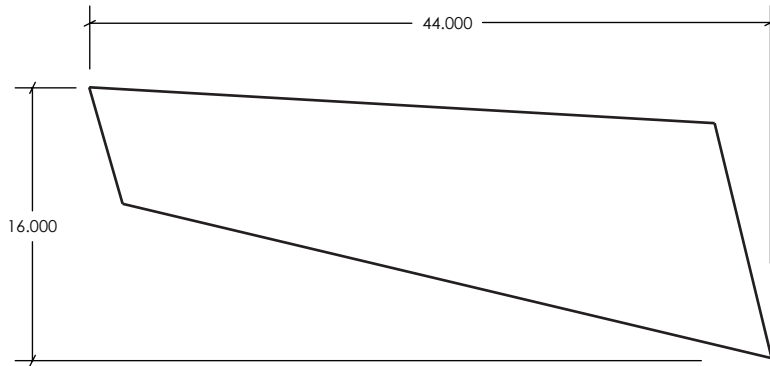

ELEMENT E-44 PLANTER

16"H x 44"W x 16"D
VOLUME: 20 US GALLONS | 2.67 CUBIC FEET

MANUFACTURED FROM:
.125" ASTM A240 STAINLESS STEEL | NDSF FINISH ONLY | 65 lbs
T-304 (T-316L BY REQUEST),
.125" CORTEN STEEL ASTM A588 | 65 lbs
OR .125" ALUMINUM ASTM B-209, 5052 ALLOY | 23 lbs
WITH A POLYESTER BASED ARCHITECTURAL/MARINE GRADE POWDER COAT FINISH
AVAILABLE IN STANDARD FINISHES OR IN ANY RAL COLOR
DRAINAGE HOLES INCLUDED | MAY BE MANUFACTURED IN MIRRORED PAIRS

P L A N T E R W O R X 9 8 7 E S S E X S T B R O O K L Y N N Y 1 1 2 0 8
T 7 1 8 . 9 6 3 . 0 5 6 4 F 7 1 8 . 9 6 3 . 0 5 6 5
P L A N T E R W O R X . C O M